

Sentry Switched CDU

Key Features

- > **Remote Power Management:**
Power cycle individual power outlets, or groups of power outlets, to remotely reboot servers and network devices, anywhere in the world. Or, power-off unused power receptacles
- > **High Power Distribution:**
208V, 20A or 30A; 230V 16A or 32A power input feed options
- > **High Density:** Single power input feed; 16 outlets per enclosure
- > **IP Access & Security:** Web interface, SSL, SSH, Telnet, SNMP, FTP, SNMP, Syslog, LDAP, LDAPS, RADIUS, TACACS, RS-232 access
- > **Add an Expansion Module:**
Connect the Switched Expansion CDU (CX) to a Master unit (CW) for power management of separate power circuits from a single IP address
- > **Environmental Monitoring:**
Each Switched CDU supports two temperature & humidity probes and reports conditions thru the Web interface
- > **SNMP Traps:** Provide automated alerts for power and environmental conditions
- > **Input Current Monitor:**
Precisely measure the aggregate current draw (in amps) on each power circuit. On-site verification of the input current with the LED digital display. Remote verification via browser or serial screen.
- > **Power-up Sequencing:** Prevent an in-rush power overload

CW-16V2/VE with C13 Outlets and PIPS

High-Density Power Distribution

The Switched CDU's combine remote configuration and management with power distribution and power and environmental monitoring. Reboot a single or dual-power server with one command. Receive SNMP alerts when power or environmental conditions exceed thresholds. Assign users specific access rights to designated outlets or groups.

Only the Switched CDU products provide the flexibility needed for all data centers and remote sites, including power requirements for high-amp, high voltage; UL 60950-1 branch circuit protection; SSL & SSH security; and SNMP-based input current monitoring.

Additional Benefits:



Branch Circuit Protection

The Sentry CDU Family meets the new UL 60950-1 requirement for branch circuit protection.

Attention! The Sentry CDU products meet the above criteria by providing overcurrent protection with UL-listed Bussman SC fuses for each branch circuit.



PIPS - Per Input Power Sensing

Accurately measures Active Power, Apparent Power, Energy k-Wh, Power Capacity, and Power Capacity Used using the network interface. See the aggregate current draw, in Amps, locally using the onboard LED.



Temperature and Humidity

The Switched CDU supports two external probes. Each of these probes measure both temperature and humidity. Receive SNMP-based alert notifications when conditions exceed defined thresholds.



Linking (Expansion Modules)

The Switched CDU family has the capability to daisy chain units together. The Expansion Module provides the ability to link two power circuits under one IP address.



Model	Available Input Voltages	Amperage	Available Input Cord	Outlets	Dimensions** (L x W x D)
CW-16V2A317 CX-16V2A317*	208-240V 50/60Hz	20A	IEC C20 Inlet, Bottom Entry	(16) IEC 60320/C13	49.5 x 1.75 x 2.25 in. (1257 x 44 x 57 mm)
CW-16V2C317 CX-16V2C317*	208-240V 50/60Hz	30A	NEMA L6-30P Plug, 10'(3m), Bottom Cord	(16) IEC 60320/C13	49.5 x 1.75 x 2.25 in. (1257 x 44 x 57 mm)
CW-16VEA317 CX-16VEA317*	230V 50/60Hz	16A	IEC C20 Inlet, Bottom Entry	(16) IEC 60320/C13	49.5 x 1.75 x 2.25 in. (1257 x 44 x 57 mm)
CW-16VEK317 CX-16VEK317*	230V 50/60Hz	32A	IEC Blue 2P+G Plug, 10'(3m), Bottom Cord	(16) IEC 60320/C13	49.5 x 1.75 x 2.25 in. (1257 x 44 x 57 mm)

*Please note that the depths of these enclosures are 3.0" deep at the placement of the fuse retractors

** CX refers to Expansion unit

Additional Features and Specifications

Agency Approvals

- > US & Canada (cTUVus mark) to UL 60950-1:2003 and CAN/CSA 22.2 No. 60950-1-03
- > European Union (TUVGS Mark) to EN 60950-1:2001
- > FCC Class A, Part 15
- > CE
- > EMC to EN 55022 Class A, EN 55024, CISPR 22 Class A

Communications and Security

- > 10/100 BaseT Ethernet
- > HTTP/HTTPS
- > SSLv3/TLSv1
- > SNMPv2
- > SSHv2
- > Telnet
- > LDAPv3
- > LDAPS
- > TACACS+
- > RADIUS
- > RS-232 (Serial)

Branch Circuit Protection


- > Compliant to UL 60950-1

Power Cord Options

- > PTCORD-1 IEC 60320/C19 - NEMA L6-20P , 10'(3m)
- > PTCORD-2 IEC 60320/C19 - Schuko 10'(3m)
- > PTCORD-3 IEC 60320/C19 - IEC 60309 (BS4343, CEE17) 16/20A Blue (UK Commando) 10'(3m)
- > PTCORD-4 IEC 60320/C19 - BS1363 13A (UK) 10'(3m)

Accessories

- > Optional Temperature & Humidity Probe
 - EMTH-1-1 Temperature & Humidity Probe, 10ft (3m)
- > Environmental Monitor
 - EMCU-1-1B allows up to (2) additional temperature & humidity probes, (1) water sensor, (4) dry contact closures, (1) analog-to-digital contact sensor. Includes (1) temperature/humidity probe with unit.
- > SPM (Sentry Power Manager) Appliance:
 - Monitor and Manage multiple Sentry CDU's
 - Monitor and Manage all alarm conditions
 - Reporting and Trending
 - Group or Cluster outlets for reboot and power information

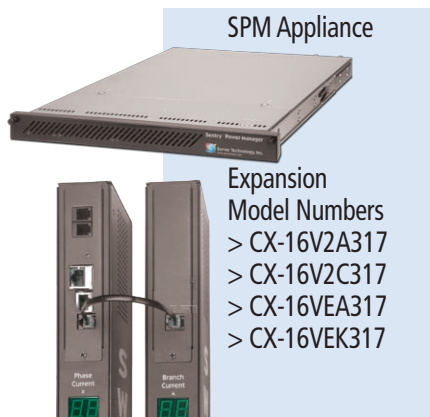

HEADQUARTERS - NORTH AMERICA
 Server Technology, Inc.
 1040 Sandhill Drive
 Reno, NV 89521
 United States
 1.775.284.2000 Tel
 1.775.284.2065 Fax
 sales@servertech.com
 www.servertech.com
 www.servertechblog.com

Western Europe, Middle East and Africa
 Server Technology
 Fountain Court
 2 Victoria Square
 Victoria Street
 St. Albans
 AL1 3TF
 United Kingdom
 +44 (0) 1727 884676 Tel
 +44 (0) 1727 220815 Fax
 salesint@servertech.com

Central Europe, Eastern Europe and Russia
 Niederlassung Deutschland
 Server Technology LLC
 42119 Wuppertal
 Germany
 Tel: + 49 202 693917 x 0
 Fax: + 49 202 693917-10
 salesint@servertech.com

APAC
 Server Technology
 Room 2301, 23/F, Future Plaza
 111-113 How Ming Street,
 Kwun Tong, Hong Kong
 Direct line: +852 3916 2048
 Fax Line: +852 3916 2002
 salesint@servertech.com