

Smart Power Monitor

CS-2HD2/DE 208V/230V with C19/C20 Connectors

Key Features

- >**Input Current Monitor:**
Precisely measure the aggregate current draw (in amps) on each power circuit. Networked verification via web browser or serial screen.
- >**High Density:** 208-230V 16/20A input/output design.
- >**IP Access & Security:** Web interface, SSL, SSH, telnet, SNMP, FTP, SNT, Syslog, LDAP, LDAPS, RADIUS, TACACS and RS-232 access.
- >**Environmental Monitoring:** Supports two external temperature and humidity probes and reports conditions thru the user interface without the need for additional IP addresses .
- > New Digital TRMS current monitoring ensures accuracy.
- >**Alerts:** Provides automated SNMP-based alarms or email alerts for power and environmental conditions.



Digital TRMS Current Load Metering

Allows the ability to easily add input current load or power monitoring to any existing cabinet via an integral web based interface or through a serial connection. This allows you to determine:

- 1) if there is available power to add additional devices to the cabinet
- 2) if you are close to exceeding the circuit's capacity and triggering an over current protection device bringing down the power in-feed
- 3) the proper loading of each CDU's power in-feed to ensure redundancy.

Note: In an A and B power in-feed configuration each Cabinet Power Distribution Unit (CDU) should not be loaded to over 40% of the rated load to ensure that if one of the power in-feeds is lost that the whole load can be supported by the CDU that still has power available.

Additional Benefits



Temperature and Humidity

The Smart CDU supports two external 10ft (3m) probes. Each of these probes measure both temperature and humidity. Receive SNMP-based alerts or email notifications when conditions exceed defined thresholds.



Input Current Monitoring

The Digital True RMS current monitoring, with improved accuracy, is critical to preventing overloads in high-density computing environments. The web GUI, accessed by a network connection or via the built in serial port, reports the input current (in Amps) of each power circuit for simple load balancing.



INPUT POWER FEED A OUTPUT POWER FEED B

Model	Input Voltage	Amperage	Inputs	Outputs	Dimensions
CS-2HD2A131Z1	208-240V 50/60Hz	20A	(2) IEC 60320/C20 Power Inlet	(2) IEC 60320/C19 Outlet	1.75 x 17.0 x 7.0 in. (44 x 432 x 178mm)
CS-2HDEA131Z1	230V 50/60Hz	16A	(2) IEC 60320/C20 Power Inlet	(2) IEC 60320/C19 Outlet	1.75 x 17.0 x 7.0 in. (44 x 432 x 178mm)

Additional Specifications

Agency Approvals

- > US & Canada (cTUVus mark) to UL 60950-1:2003 and CAN/CSA 22.2 No. 60950-1-03
- > European Union (TUVGS mark) to EN 60950-1:2001
- > FCC Class A, Part 15
- > CE
- > EMC to EN 55022 Class A, EN 55024, CISPR 22 Class A

Accessories

- > Optional Temperature & Humidity Probe
 - EMTH-1-1 Temperature & Humidity Probe, 10 ft (3m)

Communications and Security


- > 10/100 BaseT Ethernet
- > HTTP/HTTPS
- > SSLv3/TLSv1
- > SNMPv2
- > SSHv2
- > Telnet
- > LDAPS/LDAPv3
- > RADIUS
- > TACACS+
- > RS-232 (Serial)

Power Cord Options (for units with C20 power inlets)

- > PTCORD-1 IEC 60320/C19 - NEMA L6-20P, 10 ft (3m)
- > PTCORD-2 IEC 60320/C19 - Schuko 10 ft (3m)
- > PTCORD-3 IEC 60320/C19 - IEC 60309 (BS4343, CEE17) 16/20A Blue (UK Commando) 10 ft (3m)
- > PTCORD-4 IEC 60320/C19 - BS1363 13A (UK) 10 ft (3m)



Sentry : Smart Power Monitor
 Add Intelligent Power & Environmental Monitoring

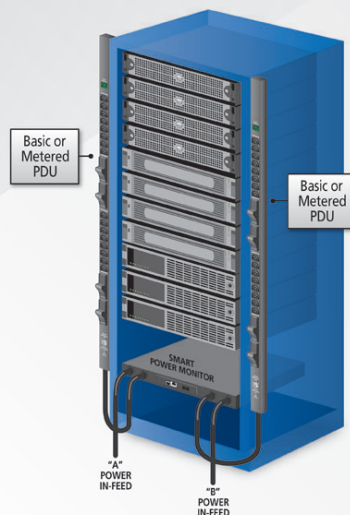

Server Technology

HEADQUARTERS - NORTH AMERICA
 Server Technology, Inc.
 1040 Sandhill Drive
 Reno, NV 89521
 United States
 1.775.284.2000 Tel
 1.775.284.2065 Fax
 sales@servertech.com
 www.servertech.com
 www.servertechblog.com

EMEA
 Server Technology Intl
 Sienna Court
 The Broadway
 Maidenhead
 Berkshire
 SL6 1NJ
 United Kingdom
 +44 (0) 1628 509053 Tel
 +44 (0) 1628 509100 Fax
 salesintl@servertech.com

APAC
 Server Technology Intl
 37th Floor, Singapore Land Tower
 50 Raffles Place
 Singapore 048623
 +65 (0) 6829 7008 Tel
 +65 (0) 6234 4574 Fax
 salesintl@servertech.com